

APPROVED


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED

**FOR
REFERENCE
ONLY**

SCALE 1 : 1.25

SECTION A-A
SCALE 3 : 1

SOCKET SET SCREW, #10-32 x 1/8, CUP POINT, ALLOY STEEL, 2X

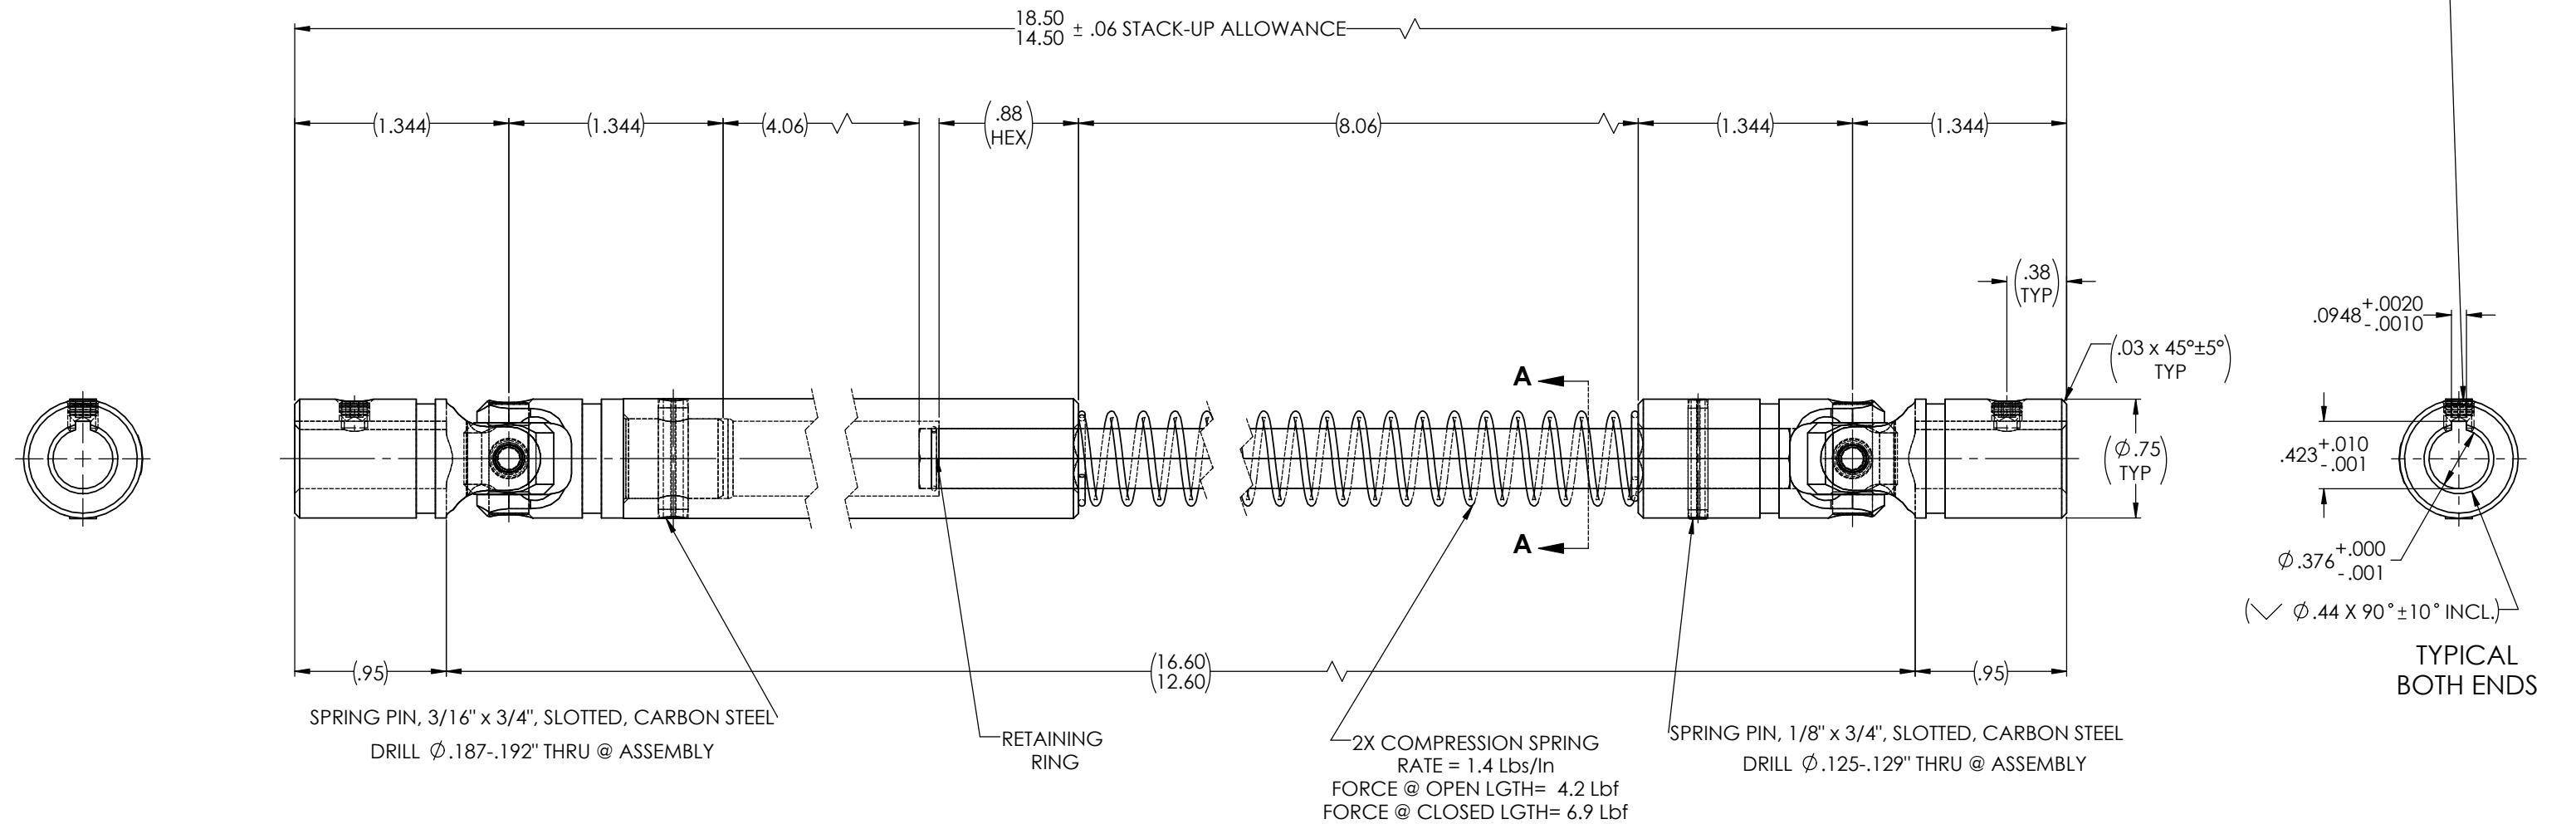

NOTE(s), UNLESS OTHERWISE SPECIFIED.

1 MARK ASSEMBLY w/ "BELDEN" LOGO, PART NUMBER, REVISION LEVEL, DATE OF MANUFACTURE (MO/YR) & BELDEN JOB No.

(2) LUBRICATE UNIVERSAL JOINTS & HEX SHAFT w/ LUBRIPLATE # 1200-2, NLGI GRADE 2, AW/EP, LITHIUM GREASE OR EQUIVALENT.

DO NOT SCALE DRAWING

UNLESS OTHERWISE SPECIFIED CHAMFER ALL HOLES BREAK ALL SHARP CORNERS DE-BURR ALL FEATURES TURNED SURFACES: $\sqrt{63}$ MILLED SURFACES: $\sqrt{125}$	STANDARD TOLERANCES, UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES (mm) ANGULAR MACHINED: $\pm 1.0^\circ$ FRACTIONAL: ± 0.015 " TWO PLACE DECIMAL: ± 0.010 " THREE PLACE DECIMAL: ± 0.005 " FOUR PLACE DECIMAL: ± 0.0005 " CONCENTRICITY: .0025" T.I.R.	MATERIAL: ALLOY STEEL HEAT TREAT: SEE DETAIL DRAWINGS FINISH/COATING: NONE	DRAWN JP 17 JAN 23 CHECKED RNK 05/25/2023 ENG APPR RNK 08/14/2023 MFG APPR QUALITY	INITIALS DATE	Belden Universal www.beldenuniversal.com TITLE: ASSEMBLY, DRIVE SHAFT
			COMMENTS:	SIZE DWG. NO. B TUJ-HD750x375K-L	REV
			SCALE: 2:1	WEIGHT (Lbs): 1.23	SHEET 1 OF 2
			PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BELDEN UNIVERSAL. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BELDEN UNIVERSAL IS PROHIBITED.		