

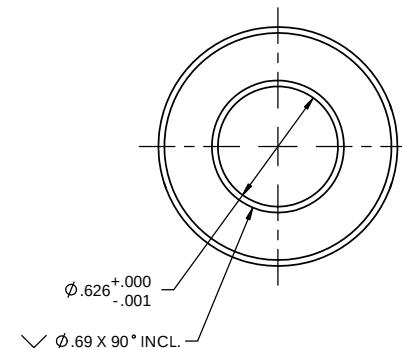


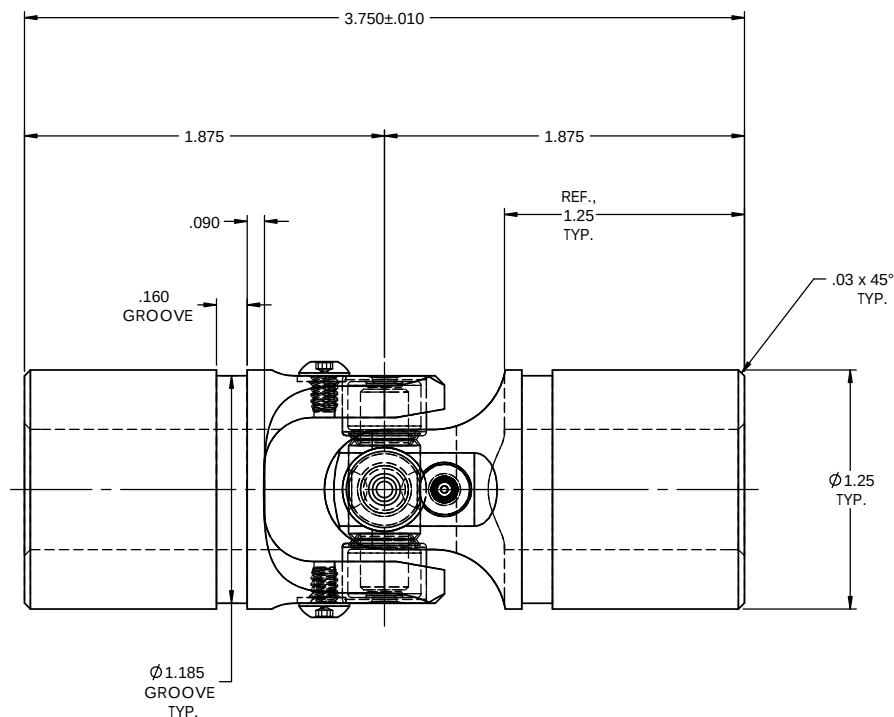

INFORMATION IN THIS DRAWING
PROVIDED FOR REFERENCE ONLY



TYPICAL BOTH ENDS

- (1) UNIVERSAL JOINT IS MARKED w/ "BELDEN" LOGO, PART NUMBER / DRAWING NUMBER, REVISION LEVEL (IF ANY), DATE OF MANUFACTURE (MO/YR), AND BELDEN JOB NUMBER.
- (2) UNIVERSAL JOINT IS LUBRICATED w/ TRIBOLUBE 12, NLGI GRADE 2, MULTI-PURPOSE SYNTHETIC GREASE.
- (3) UNIVERSAL JOINT IS CAPABLE OF OPERATING AT ANY ANGLE UP TO AND INCLUDING 45°, 90° FOR THE DOUBLE UNIVERSAL JOINT.
- (4) UNIVERSAL JOINT HAS STANDARD GROOVES TO ACCEPT INSTALLATION OF PROTECTIVE COVERS (BOOTS). BOOTS AVAILABLE SEPARATELY. REFER TO BELDEN CATALOG, WEBSITE, OR CONTACT BELDEN SALES.
- (5) REFER TO BELDEN CATALOG, WEBSITE, OR CONTACT BELDEN SALES FOR TORQUE CAPACITY.
- (6) THIS DRAWING REPRESENTS A STANDARD BELDEN ITEM.
CUSTOM UNIVERSAL JOINTS ARE AVAILABLE UPON REQUEST. PLEASE CONTACT BELDEN SALES.

BELDEN PART NUMBER: UJ-NB1250x625

DO NOT SCALE DRAWING

UNLESS OTHERWISE SPECIFIED CHAMFER ALL HOLES BREAK ALL SHARP CORNERS DE-BURR ALL FEATURES TURNED SURFACES: $\frac{63}{125}$ MILLED SURFACES: $\frac{63}{125}$ PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BELDEN INCORPORATED. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BELDEN INCORPORATED IS PROHIBITED.	STANDARD TOLERANCES, UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES (mm) ANGULAR MACHINED: $\pm 1.0^\circ$ FRACTIONAL: ± 0.015 TWO PLACE DECIMAL: ± 0.010 THREE PLACE DECIMAL: ± 0.005 FOUR PLACE DECIMAL: ± 0.0005 CONCENTRICITY: .0025" T.I.R.	MATERIAL ALLOY STEEL	<table><tr><th>NAME</th><th>DATE</th></tr><tr><td>DRAWN</td><td>JK 03MAY13</td></tr><tr><td>CHECKED</td><td>RNK 03MAY13</td></tr><tr><td>ENG APPR.</td><td>RNK 03MAY13</td></tr><tr><td>MFG APPR.</td><td></td></tr><tr><td>Q.A.</td><td></td></tr><tr><td>COMMENTS:</td><td></td></tr></table>		NAME	DATE	DRAWN	JK 03MAY13	CHECKED	RNK 03MAY13	ENG APPR.	RNK 03MAY13	MFG APPR.		Q.A.		COMMENTS:		Belden Incorporated www.beldenuniversal.com	
	NAME	DATE																		
	DRAWN	JK 03MAY13																		
	CHECKED	RNK 03MAY13																		
	ENG APPR.	RNK 03MAY13																		
	MFG APPR.																			
	Q.A.																			
COMMENTS:																				
	HEAT TREAT NONE	TITLE: ASSEMBLY, UNIVERSAL JOINT, NEEDLE BEARING																		
	FINISH NONE	SIZE DWG. NO. REV C UJ-NB1250x625																		
INTERPRET GEOMETRIC TOLERANCES I.A.W. ANSI Y14.5M-1992		SCALE: 2:1 WT (lb) 0.798 SHEET 1 OF 2																		